

### GENERAL DESCRIPTION:

Electronic faucet with proximity operation. Vandal-resistant solid brass construction. Operates on DC (battery) or AC permanent power. Water pressure range from 20 to 125 psi. Single inlet 15" flexible stainless steel hose with 3/8" compression fitting for spout connection.

### PRODUCT FEATURES:

**Vandal-Resistant Brass Body:** Durable - Excellent in high use applications.

#### Power Options:

- **Battery** - Approx. 4 years with Lithium Battery CR-P2
- **Plug-In** - **Integral** low voltage transformer (115 VAC supply) with 6 foot long power supply.

#### Easy and Flexible Installation:

3-Hole, 4" Centerset installation.  
Water resistant solenoid enclosure mounts to wall.

#### Integrated; Easy Service Strainer:

Patented integrated strainer enclosed in removable debris cup protects the solenoid valve and aerator from debris. Perforated stainless steel strainer is low maintenance and can be easily accessed.

#### Temperature Mixing:

Optional thermostatic mixing valve meets ASSE 1016 performance and anti-scald requirements at 0.5 GPM. Mixing valve will connect directly to solenoid inlet and is housed in matching enclosure.

#### End Device:

Choice of 1.5 GPM (5.7 L/min) pressure compensating, vandal-resistant aerator or 0.5 GPM (1.9 L/min) pressure compensating, vandal-resistant spray.

### CODES AND STANDARDS:

These products meet or exceed the following codes & standards:

ANSI A117.1  
ASME A112.18.1  
CSA B 125  
NSF 61/Section 9



**ADA Compliant**

### MODEL NUMBER:

#### ■ DC POWERED; single inlet

- **6055.205** with cast spout, 0.5 GPM pressure compensating, vandal-resistant spray.
- **6055.202** with cast spout, 1.5 GPM pressure compensating, vandal-resistant aerator.

#### ■ AC POWERED; single inlet


- **6056.205** with cast spout, 0.5 GPM pressure compensating, vandal-resistant spray.
- Includes AC power supply.
- **6056.202** with cast spout, 1.5 GPM pressure compensating, vandal-resistant aerator.
- Includes AC power supply.

#### ■ MULTI AC POWERED; single inlet

- **6057.205** with cast spout, 0.5 GPM pressure compensating, vandal-resistant spray. One power supply (sold separately) can operate up to 15 faucets in series. 10' extension cable included.
- **6057.202** with cast spout, 1.5 GPM pressure compensating, vandal-resistant aerator. One power supply (sold separately) can operate up to 15 faucets in series. 10' extension cable included.

#### ■ OPTIONAL Mixing Valve

- **605XTMV** Thermostatic mixing valve, flex hoses 3/8" compression 20" hose length.

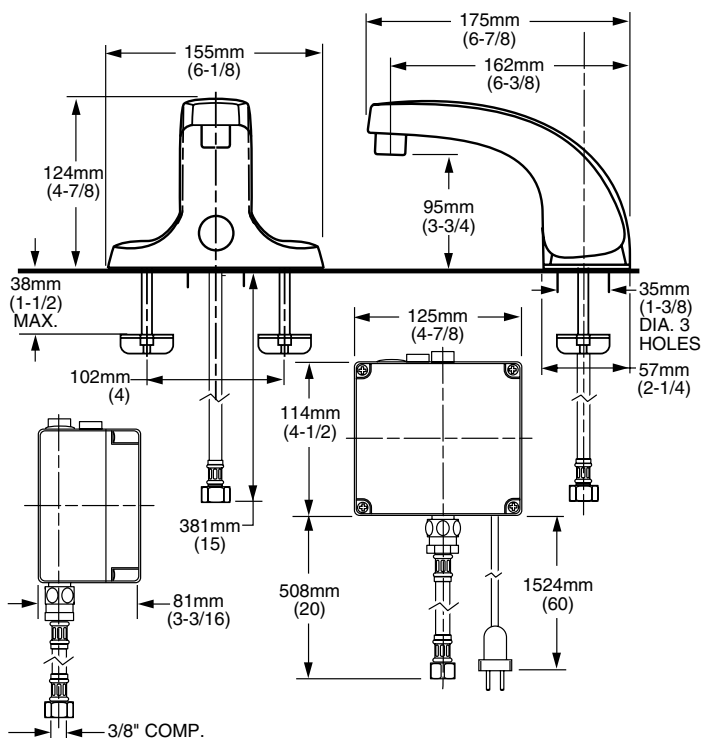

### RECOMMENDED SPECIFICATION

Electronic Proximity Lavatory shall feature vandal resistant all brass body with single inlet, and in-line strainer. Shall also feature a low energy use electronically operated solenoid valve and microprocessor controlled proximity sensors. Shall meet ANSI A112.18.1M and ANSI 117.1 codes. Fitting shall be American Standard Model # 6055\_\_\_\_, 6056\_\_\_\_, 6057\_\_\_\_.